

HDS PPB 4" Midwoofer



Type Number: 830870

Features:

The new High Definition Sound (HDS) PPB series is the culmination of Peerless working in close partnership with end users of Peerless-based audio products. With a deep understanding of customer requirements and needs, Peerless developed the proprietary and highly advanced Polypropylene Black (PPB) cone material used in the HDS PPB Series, creating a stiff but still dampened cone that remains stable even under the greatest sound pressures.



Driver Highlights: PPB diaphragm, 26 mm coil, AL


Go to Application Notes.

Go to Architecture Notes

Specs:

Electrical Data				Power handling		
Nominal impedance	Zn	8	ohm	100h RMS noise test (IEC)		W
Minimum impedance	Zmin	5.6	ohm	Long-term Max System Power		W
Maximum impedance	Zo	30.8	ohm	(IEC)		
DC resistance	Re	5.2	ohm	Max linear SPL (rms) @ power		dB/W
Voice coil inductance	Le	0.6	mΗ	Short Term Max power		W
T-S Parameters				Voice Coil and Magnet Parameters		
Resonance Frequency	fs	77.6	Hz	Voice coil diameter	26	mm
Mechanical Q factor	Qms	3.19		Voice coil height	12	mm
Electrical Q factor	Qes	0.65		Voice coil layers	2	
Total Q factor	Qts	0.54		Height of the gap	6	mm
Ratio fs/Qts	F	144		Linear excursion +/-	3	mm
Force factor	ВІ	4.8	Tm	Max mech. excursion +/-		mm
Mechanical resistance	Rms	0.9	Kg/s	Flux density of gap		mWb
Moving mass	Mms	5.9	g	Total useful flux	0.7	mWb
Suspension compliance	Cms	0.72	mm/N	Diameter of magnet	81	mm
Effective cone diameter	D	8.4	cm	Height of magnet	15	mm
	Sd	55	cm ²	Weight of magnet	0.31	Kg
Effective piston area	Vas	3	Itrs	Troight or magnet		Ü
Equivalent volume	vas	87	dB			
Sensitivity		2.1	UD			
Ratio BL/√(Re)		۷.۱				

Frequency:

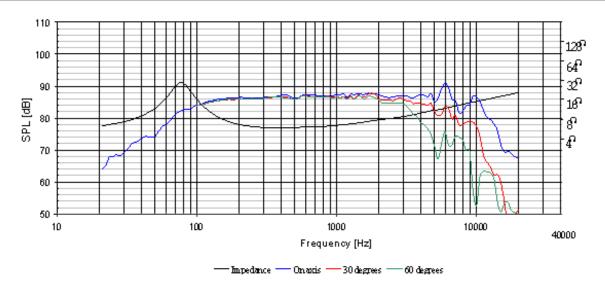

Mechanical Dimensions:

